


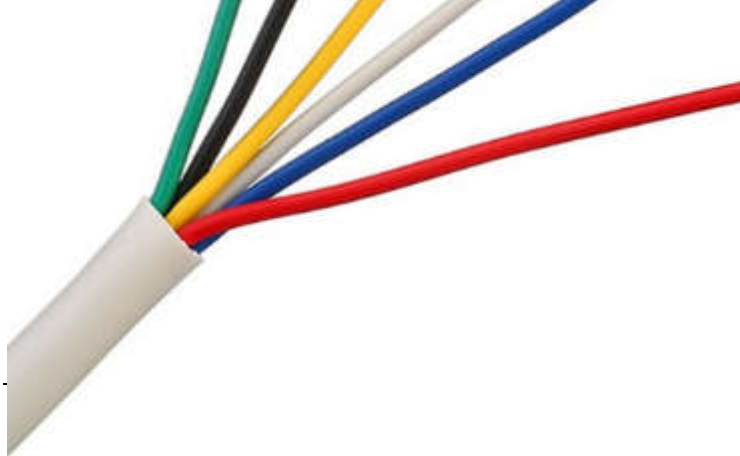

Cable Co.,Ltd

Tel:+86-571-63792788

Fax:+86-571-63792788

Web Site: www.huiercable.com

E



Conductor:6C×7/0.20mm±0.005mm CCA

Insulation:1.2mm ± 0.10mmPVC

Insulation Color: Red, Blue, White, Black, Green,Yellow

Ripcord: Yes.

Sheath:4.8mm ± 0.2mm PVC White

Nom. Thickness:0.60 mm

Min. Thickness:0.55 mm

Mechanical Properties (20℃):

Rate Voltage	300V
Rate Temperature	-15℃ up to +70℃
Conductor Resistance(DC)	≤12.8Ω/100m
Insulation Resistance(DC)	≥0.010Ω/km
Conductor breaking elongation rate	≥ 15%
Insulation tension	≥ 16MPa
Sheath tension before aging	≥ 10MPa
Insulation breaking elongation	≥ 200%
Sheath breaking elongation before aging	≥ 125%
Sheath breaking elongation after aging	≥ 100%

Package:100M/Plastic Reel ,4 Reels / Master Carton

Approved :

CE, RoHS